



MOUNTING INSTRUCTIONS

Series 748 Stainless steel repair clamp, type FST20


Note: not recommended for total break

1



Clean pipe

2

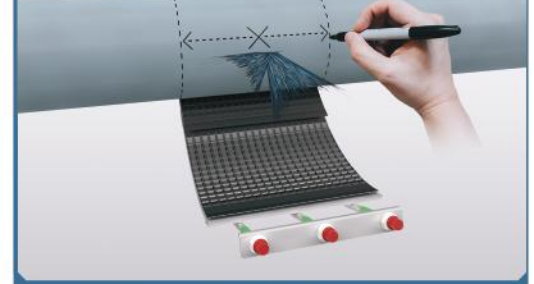


Mark correct position of repair clamp

3



Use soap and water for smooth assembly

4

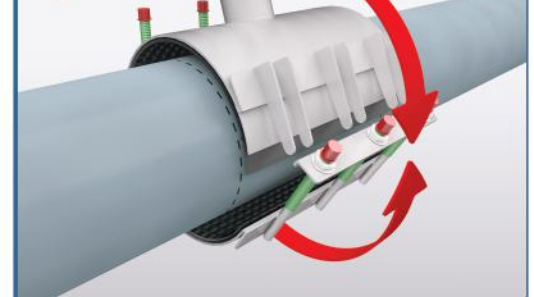


Position repair clamp around the pipe

5




Avoid double folded rubber

6

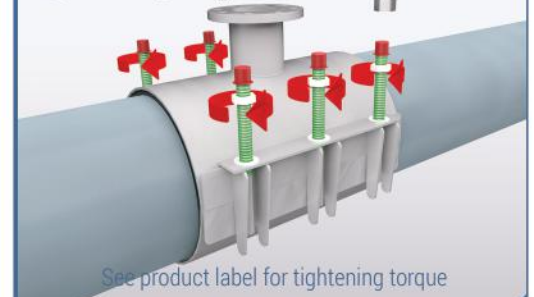

See product label for tightening torque
Cross tightening in steps of 10 Nm

7

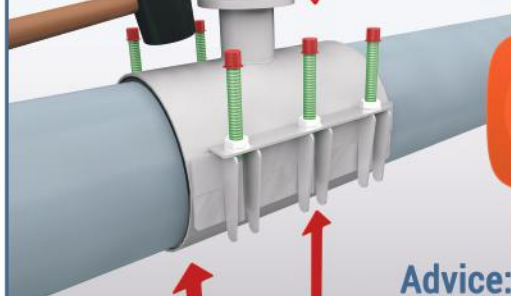

Use rubber hammer to improve rubber setting


WAIT



15 MIN

Advice:

8

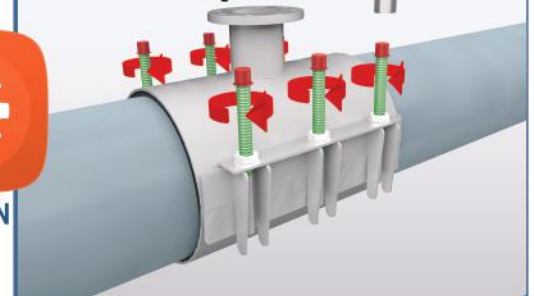

Retighten to recommended torque